


PRECISION PNEUMATIC LIFT FLAT LAPPING MACHINE

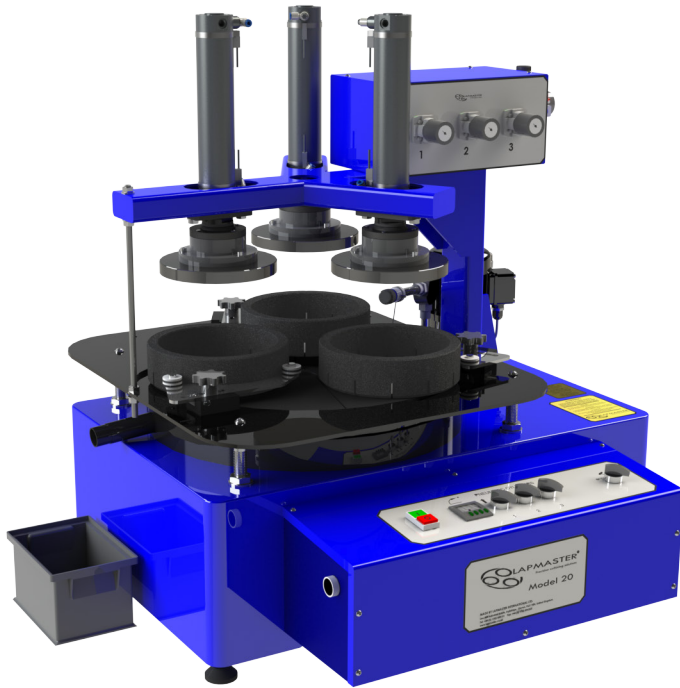

The pneumatic lift version of the Lapmaster Wolters Model 20 is based on the open face machine.

Pressure weights are attached through self aligning bearings to the rods of the pneumatic cylinders. The cylinders are mounted on a framework located over the lap plate on an upright column.

The primary function of the pneumatic arrangement is to permit loading and unloading to be carried out without the need to lift pressure weights manually. However, they can be used to supply additional loading to the components within the conditioning ring should this be required.

The machine is intended for use with free abrasive compounds. A dispensing system, for use with water and diamond compounds etc., can also be fitted.

Operator safety is a primary concern in the design. Movement of each pressure weight up or down is controlled by a two hand anti tie down control box. This arrangement requires the use of both hands on two separate buttons to function, which reduces the risk of injury when lowering the weights.

A further safety feature ensures that the pressure weights are locked in any position, so that in the event the air or electrical supplies fail, the weights will not fall.

Flatness of the machines lap plate, and consequently of the component, is controlled by adjusting the position of the conditioning rings relative to the lap plate track.

This popular bench mounted machine is also available in an open face version. Please see appropriate datasheet, available on request


STANDARD FEATURES

- Heavy duty base with integrally mounted drive motor, reduction gearbox.
- Range of loads for pressure weights 8kg (17.6lb) to 63kg (140lb) at 4.2kg/cm² (60 psi)
- Heavy duty work table, vertically adjustable.
- Three conditioning rings, with adjustable, Zytel roller bearing yoke assemblies to maintain lap flatness.
- Integral abrasive system complete with pump and multi point compound distribution.
- High torque drive unit consisting of 0.75kW motor and reduction gearbox. Lap plate speed 70 rpm.
- Operator controls at 110V, complies with EN 60 204.
- CE compliant.
- Operator panel with start / stop controls, and multiple range digital process timer.
- Waste tank.

STANDARD TOOLING

- High density, cast iron serrated lap plate. 508mm O.D. x 127mm I.D.
- Three high density cast iron serrated conditioning rings. 229mm O.D. x 191mm I.D.
- Three blank workholder discs.
- Three felt pads.
- Operation and maintenance manual.

MODEL 20 - PRECISION PNEUMATIC LIFT FLAT LAPPING MACHINE

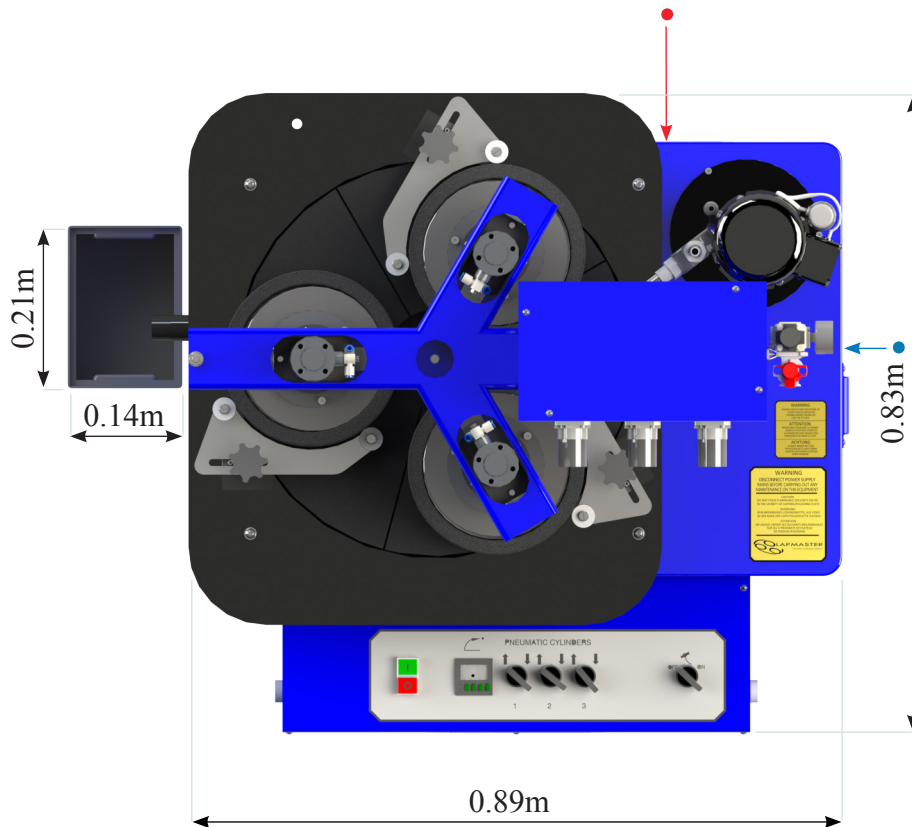

OPTIONAL TOOLING

- Flatness gauge.
- Solid stainless steel backing plates.
- Composite faced plates.
- Solid cast iron lap plate.
- Polishing pads.

OPTIONAL FEATURES


- Electronic variable speed drive.
- Electronic soft start to main drive.
- Non-standard voltages.
- Stainless steel wetted parts.
- Peristaltic pump.
- Corporate colours.
- Fixed guarding.

APPROXIMATE WEIGHT

- 250 kg.

SERVICES

- Electrical: 230/380V, 3 Phase, 50Hz
230V, 1 Phase, 50/60Hz.
- Air: 400 kPa / 4 bar.

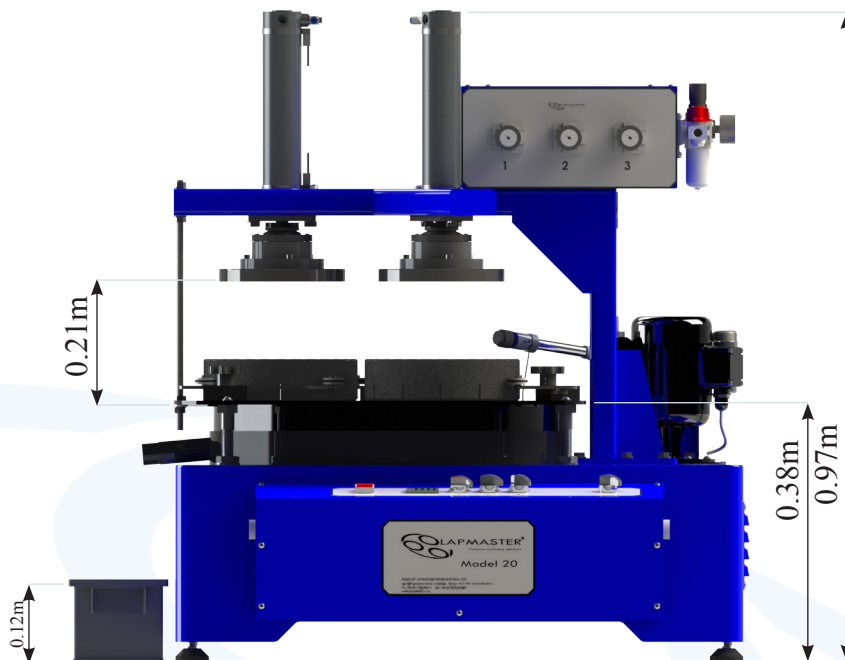

Lapmaster Wolters Ltd

International Lapping, Grinding and Polishing Machine Systems

Lee Mill Industrial Estate, Ivybridge, Devon, PL21 9EN UK

T: + 44 (0)1752 893191 F: + 44 (0)1752 896355 E: sales@lapmaster-wolters.co.uk

www.lapmaster-wolters.co.uk

